

Infinity XE 503X membrane nitrogen generator

Application: Designed to provide N2 for multiple laboratory instruments.

Part number: 3300574 - XE 5030 | 3300191 - XE 5031



Description


Producing between 30-390 L/min of high quality, laboratory grade nitrogen gas, the Infinity XE 503X can comfortably supply gas for multiple laboratory instruments. With variable nitrogen purity available between 95-99.5% (depending on flow rate), Infinity XE generators can be configured to suit the needs of several applications, such as LC-MS, ELSD, Sample Preparation & more.

Peak Scientific's Infinity XE series generators have been engineered to provide nitrogen gas to laboratories that already have an external source of clean, dry & oil-free air; and meets a minimum grade of ISO8573-1:2010 Class 1.4.1 - NB: Were this is not available, Peak can provide consultative assistance on what specifications of compressed air & pre-filtration are required, as well as supply these items as part of a complete Infinity XE gas generation solution.

Infinity XE series nitrogen generators are effectively silent whilst in operation and have no moving parts, so require minimal annual maintenance.

Models available with or without optional O2 analyzer & purity safeguard system.

- **Gas types** Nitrogen
- **Integrated compressor:** No
- **Application Types:** Designed to provide N2 for multiple laboratory instruments.

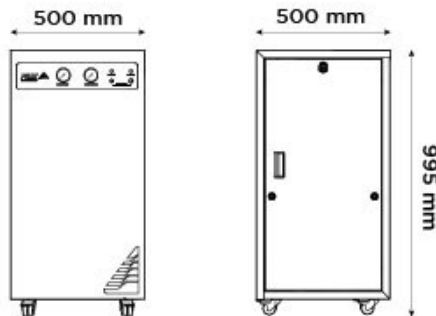

Key Features

- Flow rates from 30-390 L/min
- Variable flow rate, with up to 135 psi outlet pressure
- N2 purity from 95-99.5% (dependent on flow rate)
- Tried and tested membrane technology for high quality gas
- Small footprint using minimal laboratory space
- Effectively silent when in operation
- O2 analyzer option available, XE 5031 model includes PurityGuard for purity critical applications

Technical Specifications

| Infinity XE 503X membrane nitrogen generator | |
|--|-------------------------------------|
| Gas Type | Nitrogen |
| Max Gas Flow: | 390 *L/min |
| Max Output Pressure: | 135psi/9.3bar |
| Max Output Pressure: | 135psi/9.3bar |
| Max Purity: | 99.5% * |
| Min Inlet Pressure: | 60psi/4.1bar |
| Max Inlet Pressure: | 145psi/10bar |
| Min Inlet Air Quality: | ISO8573 - 1:2010 Class 1.4.1 |
| Start Up Time: | 30 mins |
| Voltage: | 100-230 ± 10% VAC |
| Frequency: | 50 / 60 Hz |
| Current: | 0.4Amps at 100V / 0.174Amps at 230V |
| Max Operating Temp: | 30°C / 86°F |
| Particles: | <0.01µm |
| Accreditations: | CE |
| Size (HxWxD) mm | 995 x 500 x 500 mm |
| Size (HxWxD) Inches | 39.2 x 19.7 x 19.7 inches |
| Generator Weight | 85kg / 187lbs |

*Dependent on inlet pressure, inlet/outlet flow and Inlet Air Quality

[PEAK Protected]TM

Peak Scientific gas generators define the benchmark in reliability, convenience and performance in laboratories around the world, and come backed with a 12 month warranty. Beyond this period however you can ensure that your investment continues to be **[Protected]** by our comprehensive generator care cover.

Our world-class aftercare support packages deliver a program of scheduled preventative maintenance whilst giving you the reassurance of instant access to worldwide technical support and priority on-site response in the untimely event of a breakdown.

- For ordering parts visit: www.peakscientific.com/ordering/
- For service plans visit: www.peakscientific.com/service/service-plans/

Peak Scientific UK
Tel: +44 (0)141 812 8100
Fax: +44 (0)141 812 8200

Peak Scientific North America
Tel: +1-800-767-6532
Fax: +1-978-608-9503

Peak Scientific China
Tel: +86 21 5079 1190
Fax: +86 21 5079 1191
For a full list of our worldwide office locations, please visit:
Web: www.peakscientific.com
Email: discover@peakscientific.com

Peak Scientific's Quality Management System conforms to: ISO:9001



0003