

# i-Flowlab Prime 7XX2

nitrogen-generator

**Part number:** 3304462 | 3304463 |  
3304464 | 3304465 | 3304466 |  
3304467 | 3304468 | 3304469 |  
3304470 | 3304471



## Description

i-Flow Prime nitrogen generators have been engineered by PEAK's gas generation specialists to meet the total nitrogen supply needs of manufacturing and processing facilities. Harnessing the latest gas purification technologies, i-Flow Prime delivers nitrogen at flow rates from 0.76-268.32 M3/h\* and is available in over 100 pre-configured flow and purity specifications. i-Flow is a modular and scalable design with the option to increase the flow rate retrospectively as your nitrogen requirements grow.

The 7XX2 range includes an oxygen analyzer which provides real-time purity monitoring as a percentage. i-Flow Prime also comes with our built-in PurityGuard™ gas monitoring, application safeguard system and integrated air filtration for additional peace of mind.



## Application Types


Multiple LC-MS, Sample Preparation, Glovebox, Fume Hoods, NMR & more

## Generator Details

- **Gas types:** Nitrogen
- **Integrated compressor:** No

## Key Features

- Cost effective, total laboratory nitrogen gas supply solution
- Consistent & reliable, always available on-demand to meet application needs
- Energy efficient, with low ongoing running costs & minimal maintenance
- Scalable & future-proof design, with ability to expand capacity by adding more CMS columns
- Safe and convenient, no more manual handling or on-site health & safety concerns
- Verified industry standards compliance (EIGA, EC Food Grade, European Pharmacopoeia, JECFA & US FDA)
- Built-in oxygen analyzer, for continuous, real time monitoring of nitrogen purity & quality
- Optional purity safeguard, auto-bypass feature for purity critical applications
- i-Flow generators come ready with remote control & monitoring systems, along with optional interfaces for live status tracking & BMS integration
- Take complete control of your costs & nitrogen gas requirements, by bringing your supply in-house
- Eliminate the need for gas cylinders, LN2 dewars /micro-bulk deliveries or large bulk liquid trucking

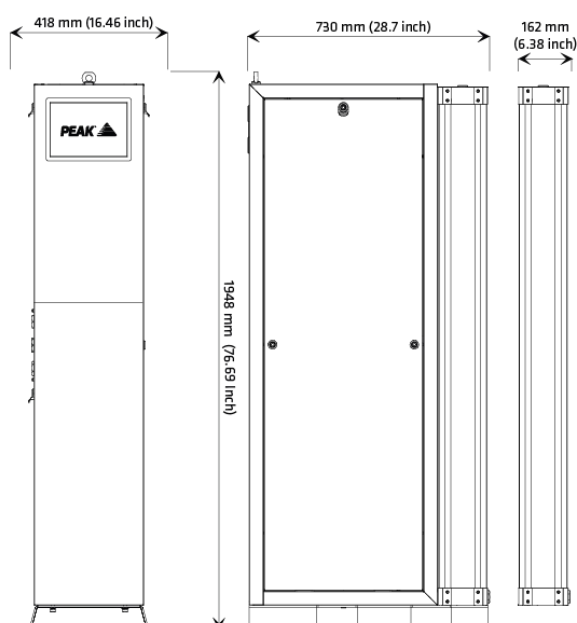

- Reduce your on-site carbon footprint & become a self-reliant and sustainable operation

## [**PEAK** Protected]<sup>TM</sup>

Peak Scientific gas generators define the benchmark in reliability, convenience and performance in laboratories around the world, and come backed with a 12 month warranty. Beyond this period however you can ensure that your investment continues to be **[Protected]** by our comprehensive generator care cover.

Our world-class aftercare support packages deliver a program of scheduled preventative maintenance whilst giving you the reassurance of instant access to worldwide technical support and priority on-site response in the untimely event of a breakdown.

- For ordering parts visit: [www.peakscientific.com/ordering/](http://www.peakscientific.com/ordering/)
- For service plans visit: [www.peakscientific.com/service/service-plans/](http://www.peakscientific.com/service/service-plans/)

**Peak Scientific UK**  
Tel: +44 (0)141 812 8100  
Fax: +44 (0)141 812 8200

**Peak Scientific North America**  
Tel: +1-800-767-6532  
Fax: +1-978-608-9503

**Peak Scientific China**  
Tel: +86 21 5079 1190  
Fax: +86 21 5079 1191  
For a full list of our worldwide  
office locations, please visit:  
Web: [www.peakscientific.com](http://www.peakscientific.com)  
Email: [discover@peakscientific.com](mailto:discover@peakscientific.com)

Peak Scientific's Quality Management System conforms to: ISO:9001



## Technical Specifications

### i-FlowLab Prime 7XX2 laboratory nitrogen supply

Gas Type	Nitrogen
Max Gas Flow:	1300L/min
Max Purity:	99.9995%
Max Inlet Pressure:	167psi/11.5bar
Min Air Inlet Flow:	Dependent on required flow rate
Min Inlet Air Quality:	ISO 8573-1:2010 Class 2.4.1
Start Up Time:	Dependent on model
Power Consumption:	250 Watts
Voltage:	100 - 240 VAC $\pm$ 10%
Frequency:	50 / 60 Hz
Current:	2.0-1.0 Amp
Max Operating Temp:	50°C / 122°F
Particles:	<0.01 $\mu$ m
Noise Level:	59dBa @1m
Accreditations:	CSA, CE
Size (HxWxD) mm	1948 x 418 x 730 mm
Size (HxWxD) Inches	76.7 x 16.5 x 28.7 inches
Generator Weight	179kg / 393.8lbs

## [**PEAK** Protected]<sup>TM</sup>

Peak Scientific gas generators define the benchmark in reliability, convenience and performance in laboratories around the world, and come backed with a 12 month warranty. Beyond this period however you can ensure that your investment continues to be **[Protected]** by our comprehensive generator care cover.

Our world-class aftercare support packages deliver a program of scheduled preventative maintenance whilst giving you the reassurance of instant access to worldwide technical support and priority on-site response in the untimely event of a breakdown.

- For ordering parts visit: [www.peakscientific.com/ordering/](http://www.peakscientific.com/ordering/)
- For service plans visit: [www.peakscientific.com/service/service-plans/](http://www.peakscientific.com/service/service-plans/)

**Peak Scientific UK**  
Tel: +44 (0)141 812 8100  
Fax: +44 (0)141 812 8200

**Peak Scientific North America**  
Tel: +1-800-767-6532  
Fax: +1-978-608-9503

**Peak Scientific China**  
Tel: +86 21 5079 1190  
Fax: +86 21 5079 1191  
For a full list of our worldwide office locations, please visit:  
Web: [www.peakscientific.com](http://www.peakscientific.com)  
Email: [discover@peakscientific.com](mailto:discover@peakscientific.com)

Peak Scientific's Quality Management System conforms to: ISO:9001

