

Solaris 10 ELSD nitrogen generator

Application: Solaris


Part number: 65-0001



Description

Peak Scientific's Solaris 10 Nitrogen generator has been developed to provide an optimal gas generation solution for ELSD or Compact Mass Spectrometers, with the goal of reducing instrument downtime and improving workflow efficiencies. Engineered with a space-saving design, Solaris 10 can be placed on a benchtop and paired with an additional optional Solaris air compressor unit to provide air supply for labs without an in-house air supply or for those who wish to contain their gas supply in a single system.

- **Gas types** Nitrogen
- **Integrated compressor:** No
- **Application Types:** ELSD, Compact Mass Spectrometers or TLD Readers

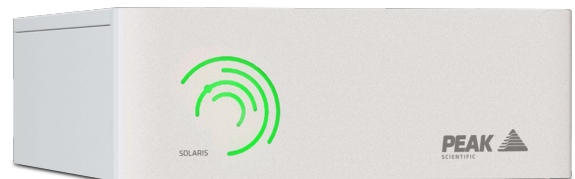

Key Features

- Variable outlet flow, pressure and purity
- UHP nitrogen for ELSD at up to 10 L/min, 100 psi and up to 99.5% purity
- Compact benchtop form factor, discrete aesthetic styling
- Colour indicative LED lighting for easy status awareness
- Optional Solaris Air Compressor stackable module
- Engineered on reliable and proven existing technology
- Manufactured and tested to highest spec in UK, CE/FCC certified
- 12 month comprehensive on-site warranty

Technical Specifications

| | Solaris 10 ELSD nitrogen generator |
|------------------------|------------------------------------|
| Gas Type | Nitrogen |
| Max Gas Flow: | 10L/min |
| Max Output Pressure: | 100psi/6.9bar |
| Max Output Pressure: | 100psi/6.9bar |
| Max Purity: | 99.5% |
| Gas Outlets Fitting: | 1 x 1/4 " BSPP |
| Min Inlet Pressure: | 80psi/5.5bar |
| Max Inlet Pressure: | 130psi/9bar |
| Min Air Inlet Flow: | 18-30 |
| Min Inlet Air Quality: | ISO8573 - 1:2010 Class 1.4.1 |
| Power Consumption: | Up to 23 VA |
| Voltage: | 110 / 230 V |
| Frequency: | 50 / 60 Hz |
| Current: | 0.1 A |
| Heat output: | 78 BTU |
| Max Operating Temp: | 35°C / 95°F |
| Particles: | <0.1µm |
| Contaminants: | Phthalate & BHT Free |
| Accreditations: | CE, CSA, FCC |
| Size (HxWxD) mm | 156 x 417 x 540 mm |
| Size (HxWxD) Inches | 6.1 x 16.4 x 21.3 inches |
| Generator Weight | 12kg / 26.4lbs |

[PEAK Protected]TM

Peak Scientific gas generators define the benchmark in reliability, convenience and performance in laboratories around the world, and come backed with a 12 month warranty. Beyond this period however you can ensure that your investment continues to be **[Protected]** by our comprehensive generator care cover.

Our world-class aftercare support packages deliver a program of scheduled preventative maintenance whilst giving you the reassurance of instant access to worldwide technical support and priority on-site response in the untimely event of a breakdown.

- For ordering parts visit: www.peakscientific.com/ordering/
- For service plans visit: www.peakscientific.com/service/service-plans/

Peak Scientific UK
Tel: +44 (0)141 812 8100
Fax: +44 (0)141 812 8200

Peak Scientific North America
Tel: +1-800-767-6532
Fax: +1-978-608-9503

Peak Scientific China
Tel: +86 21 5079 1190
Fax: +86 21 5079 1191
For a full list of our worldwide office locations, please visit:
Web: www.peakscientific.com
Email: discover@peakscientific.com

Peak Scientific's Quality Management System conforms to: ISO:9001

